



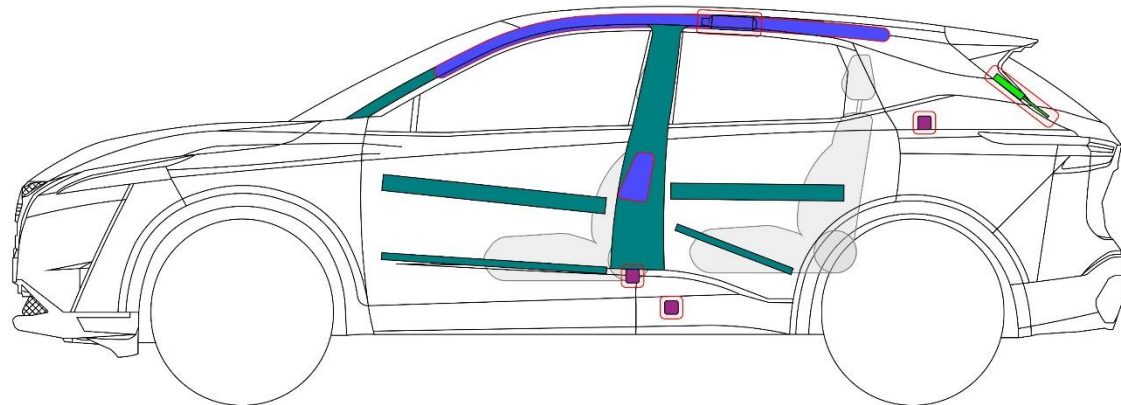

NISSAN

Qashqai

TYPE: J12, 5-door SUV
(2021 -)

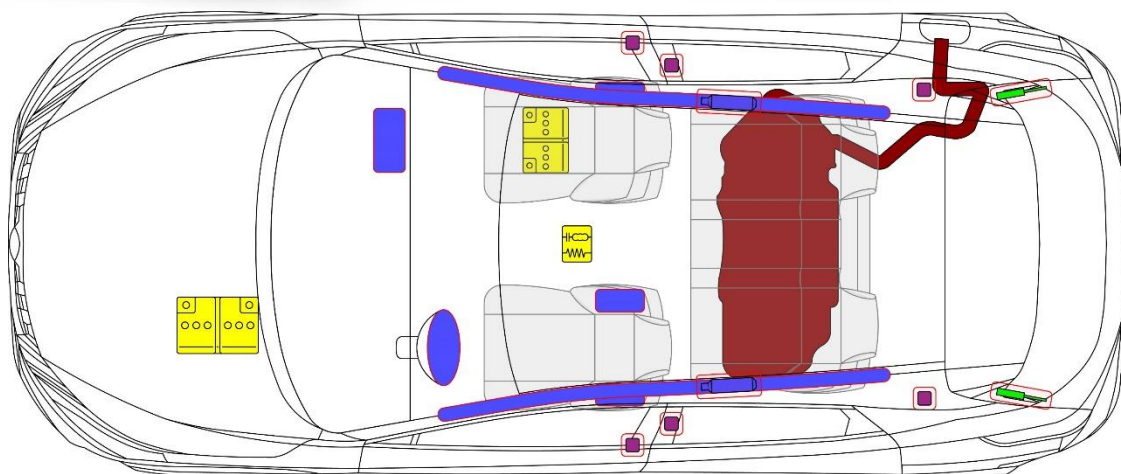

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut / Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra-capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	Battery pack, high voltage		High voltage power cable / component		High voltage device that disconnects High voltage		Fuse box disabling high voltage		High voltage ultra-capacitor,
	Fuel tank content Gasoline / Ethanol								

1. Identification / recognition



Fuel cap

Model

Brand

2. Immobilization / stabilization / lifting


Immobilize vehicle:

1. Block wheels
2. For automatic transmission select the P (park) position
3. Set parking brake
4. Press start/stop button



Lifting points:

Appropriate lifting points;


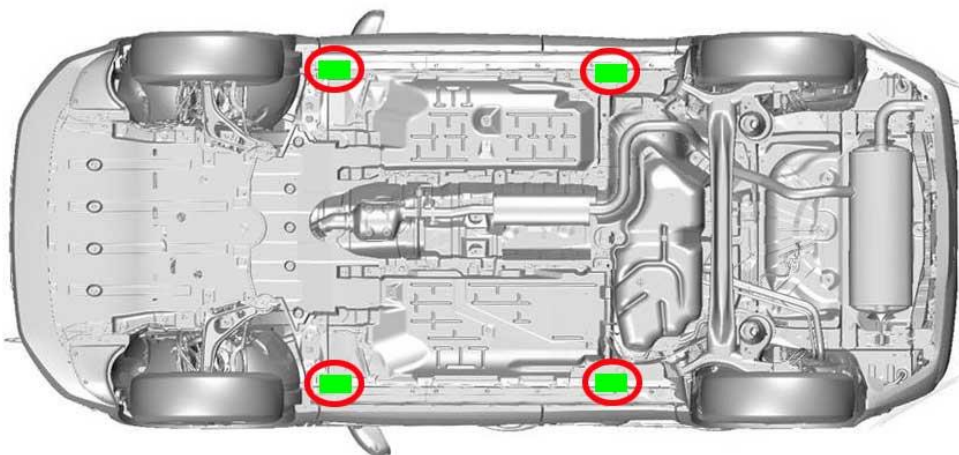


3. Disable direct hazards / safety regulations

Access to the engine compartment




Disconnect the 12 Volts battery

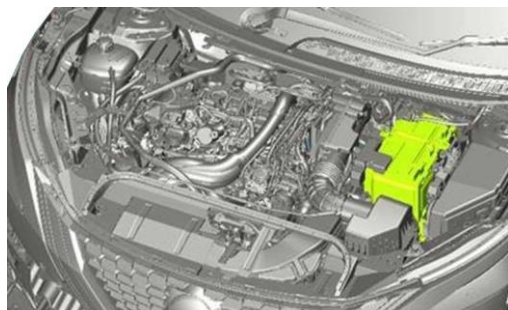


1. Switch off the ignition
2. Disconnect the negative terminal (-)
3. Disconnect the positive terminal (+)

4. Access to the occupants

High strength steel in body



High strength steel in door

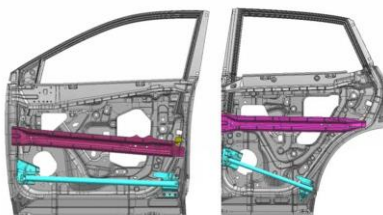

Steering column adjustment




Seat adjustment








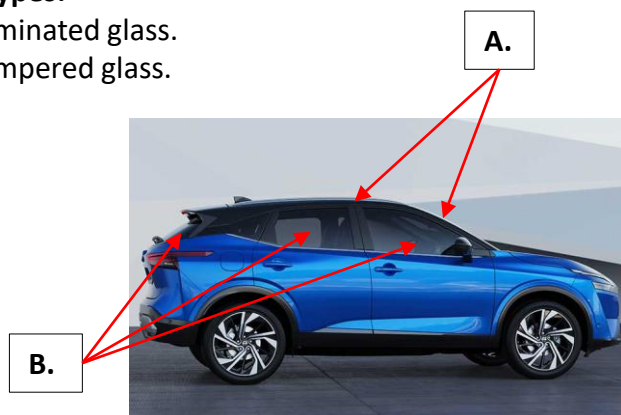











Glass types:

- A. Laminated glass.
- B. Tempered glass.



5. Stored energy / liquids / gases / solids

	12V	 
	R-1234yf 550 ±25 g	   
	55 L	 
	12V Li-ion	    

6. In case of fire



USE WATER



GAS STRUT, RISK OF MISSILE EFFECT



8. Towing / transportation / storage

Recovery hook storage



Location front hook




Location rear hook














Towing precautions

2WD
4WD



10. Explanation of pictograms used

	General warning sign		Flammable
	Warning; low temperature		Hazardous to the human health
	Air-conditioning component		Explosive
	Vehicle on fuel of liquid gr. 2		Corrosives
	Bonnet		Acute toxicity
			Use water to extinguish the fire